

REBLOC 185A_4_5A


Technical Datasheet

ASI B

REBLOC 185A_4_5A



Precast Concrete
Vehicle Restraint System

Permanent System
Anchored

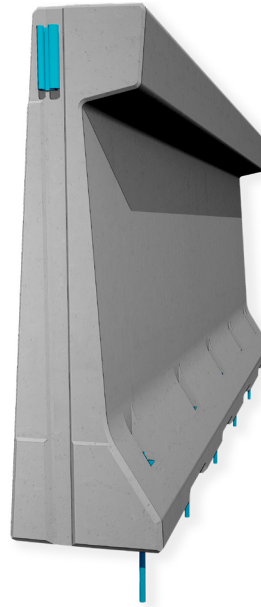

Technical data

Containment level	H4b
Working width	W2 ($W_N \leq 0.8 \text{ m}$)
Impact severity level	ASI B
Vehicle intrusion	VI2 ($VI_N \leq 0.8 \text{ m}$)
Installation	anchored (5 x adhesive anchor M24 in concrete foundation)
Application	single-sided
Minimum installation length	32 m (8 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	400 x 57 x 185 cm
Weight/element	approx. 5700 kg
Curve radius	$r \geq 80 \text{ m}$, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

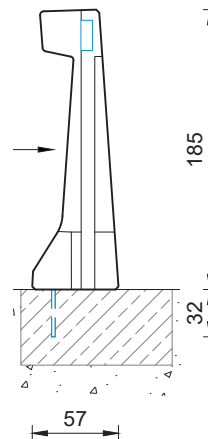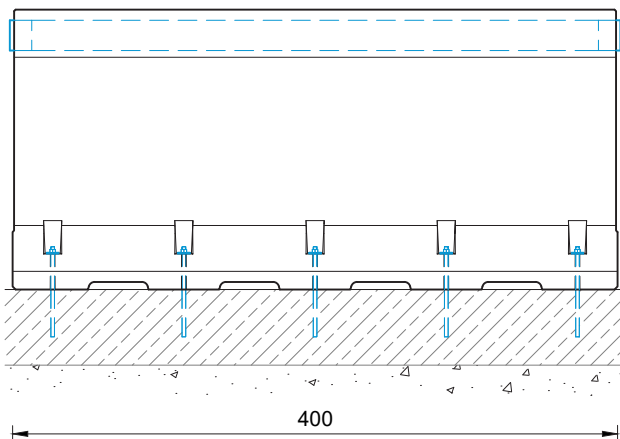

all dimensions in cm

REBLOC GmbH

Ziegelofen-Straße 736 · 3571 Gars/Kamp · Austria
Tel.: +43 (0) 2985 30528 2900
Fax: +43 (0) 2985 30528 2901

office@rebloc.com www.rebloc.com