


PRODUCT SHEET

BRIDGE GUARD DAV H4b/W3



DAV H4b/W3

Newly developed bridge guard, DAV H4b/W3 is CE marked according to European standards and meets the requirements of EN 1317-2 and En 1317-5. With a sceptor distance of 1.5 meters, the bridge guard can be mounted on bolt groups with or without tamping. The bridge guard can be mounted with or without B-profiles completely according to the customer's wishes, and with or without filling rods. All reject-beams are horizontal and with built-in deformation bracket, which ensures an ASI value B. The A-bracket ensures power transmission. The railing is at least corrosion protected to C3. Bolts are provided with rounded heads, to avoid protruding edges.

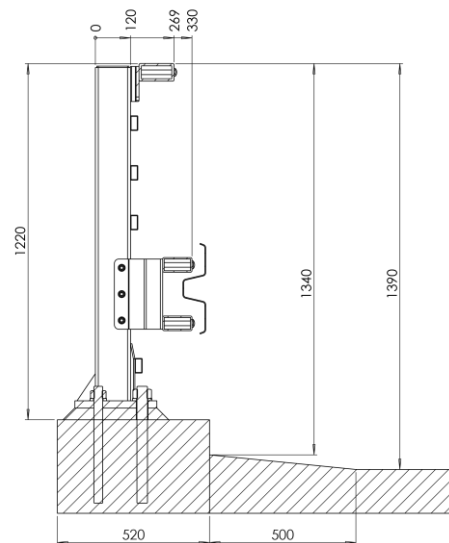

DAV H4b/W3 is primarily used on bridge structures where underlying areas require security for extra protection.

Technical data

Sceptor-distance, m	Height, m	Strenght-class	Working-Width	ASI-value	Test distance, m
1.50	1.37	H4b	W3	B	36.6